

indoor + outdoor



Par E

wall recessed luminaire



Par E 25

Lamp Type LED
 Dimmable No
 Power Supply 220V-240V / 50-60Hz
 Control On / Off
 Median useful life L70B10 50,000 Hours
 Housing Body : Aluminum Die-Cast
 Glass 6 mm Tempered
 Installation Type Wall / Ground Recessed
 Ingress protection code IP66
 Mech. impact IK08
 Working Temperature Ta : -25°C ~ +45°C
 CRI 80+
 Power Factor 0.9+
 Protection Class IEC Safety Class I

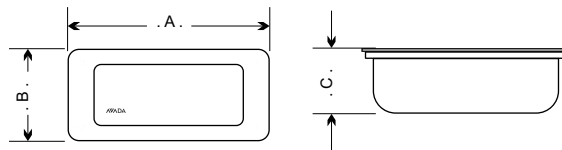

Ordering Guide Sample *Ejemplo de la guía de pedido*

Par E WR 3000 05 AS/SYM DC/AC

Model	CCT	Power	InstallationType	Beam Angle	Option
Par E	3000	05	WR-Wall Recessed	AS/SYM Ángulo de haz	AC-220-240VAC DC- 24 VDC

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso	Beam angle deg. Ángulo de haz	Length A longitud	Height B altura	Depth C fondo
Par E	5	3000k.4000k.R.G.B	500	Asymmetric	190mm	90mm	72mm
	5	3000k.4000k.R.G.B	500	90°			